

EKI-9510E-2GMPH

EKI-9510E-2GMPL

EN50155 10-Port Managed PoE M12 Ethernet Switch 72/96/110 V_{DC}

EN50155 10-Port Managed PoE M12 Ethernet Switch 24/48 V_{DC}



CE FCC

Features

- Complies with EN50155
- 8 x M12 D-Coded 10/100Mbps PoE ports + 2 x M12 X-Coded 10/100/1000Mbps ports with Bypass function
- Power Input
 - EKI-9510E-2GMPH: 72/96/110 V_{DC}
 - EKI-9510E-2GMPL: 24/48 V_{DC}
- Operating Voltage
 - EKI-9510E-2GMPH: 50.4~137.5 V_{DC}
 - EKI-9510E-2GMPL: 16.8~60 V_{DC}
- X-Ring Pro supports rapid and predictable convergence
- 8-port PoE support IEEE802.3 at/af
- M12 connector with IP40 protection

Introduction

The EKI-9500 series switch is designed for railway application with rugged and high EMC performance, being suitable for networking solution for rolling stock and wayside applications. The EKI-9500 series provides M12 connectors for Ethernet/ console/ relay/ power-input connections to ensure tight & robust connectivity, and thus to guarantee reliable operation against environmental disturbances such as vibration and shock on train.

The EKI-9510E-2GMH & EKI-9510E-2GML are managed Ethernet switches that provide 8 x Fast Ethernet M12 D-coded ports. Each of them also provides 2 x Gigabit Ethernet M12 X-coded ports with Bypass function to increase the reliability of the network. EKI-9510E-2GMH/ ML features a "flat" design which can be easily deployed with its slender size and make network deployment easier in crowded carriage/ cabinet.

Specifications

Interface

- I/O Port**
 - 8 x M12 D-Coded 10/100Mbps PoE ports + 2 x M12 X-Coded 10/100/1000Mbps ports with Bypass function
- Console port**
 - M12 A-Coded
- Power Connector**
 - M12 A-Coded

Physical

- Enclosure**
 - Aluminum Shell
- Protection Class**
 - IP 40
- Installation**
 - Wall Mount
- Dimensions (W x D x H)**
 - 216 x 132 x 59.3 mm
- Weight**
 - 1.5kg

LED Display

- System LEDs**
 - PWR1, PWR2, SYS, R.M., Alarm
- Port LED**
 - Data, PoE

Environment

- Operating Temperature**
 - 40 ~ 70°C (-40 ~ 158°F)
- Storage Temperature**
 - 40 ~ 85°C (-40 ~ 185°F)
- Ambient Relative Humidity**
 - 10~ 95% (non-condensing)

Power

- Power Consumption**
 - 10 Watts
- PoE Power Budget**
 - EKI-9510E-2GMPH: 120 Watts
 - EKI-9510E-2GMPL: 60 Watts
- Power Input**
 - EKI-9510E-2GMPH: 72/96/110 V_{DC}
 - EKI-9510E-2GMPL: 24/48 V_{DC}
- Operating Voltage**
 - EKI-9510E-2GMPH: 50.4~137.5 V_{DC}
 - EKI-9510E-2GMPL: 16.8~60 V_{DC}
 - Dual inputs Supports Overload Current Protection
 - Supports Reverse Polarity Protection


Certification

- EMI**
 - FCC Part 15 Subpart B Class A
 - CE EN55032 (CISPR)
 - EN55024 Class A
- EMS**
 - EN61000-4-2 (ESD); EN61000-4-3 (RS);
 - EN61000-4-4 (EFT); EN61000-4-5 (Surge);
 - EN61000-4-6 (CS)
- Shock**
 - IEC 61373
- Freefall**
 - IEC 60068-2-32
- Vibration**
 - IEC 61373
- Certificate**
 - EN50155; EN50121-3-2

EKI-9510E-2GMPH EKI-9510E-2GMPL

Dimensions

Unit: mm [inch]

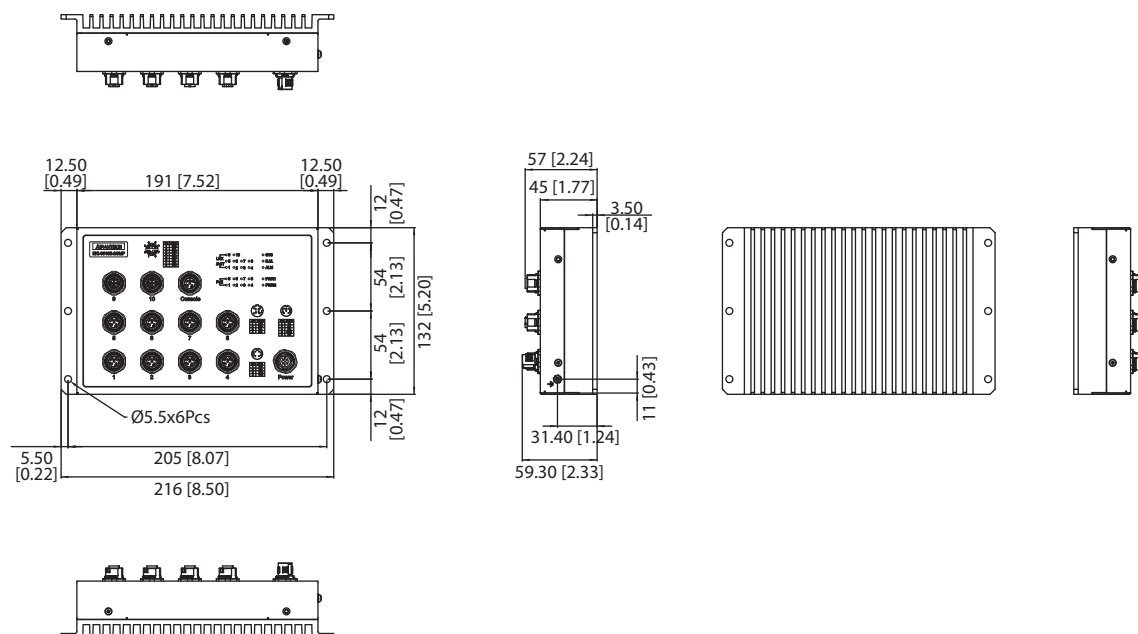

L2 Features

- **L2 MAC Address** 8K
- **Jumbo Frame** 9KB
- **VLAN Group** 256 (VLAN ID 1~4093)
- **VLAN** 802.1Q VLAN, GVRP
- **Port Mirroring** Per port, Multi-source port
- **IP Multicast** IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- **Storm Control** Broadcast, Multicast, Unknown unicast
- **Redundancy Protocol** IEEE802.1D-STP, IEEE802.1s-MSTP, IEEE802.1w-RSTP, X-Ring Pro

QoS

- **Priority Queue** Scheduling WRR (Weighted Round Robin), SP (Strict Priority)
- **Class of Service** IEEE802.1p based CoS, IP TOS, DSCP based CoS
- **Rate Limiting** Egress Rate limit
- **Link Aggregation** IEEE802.3ad Dynamic Port Trunking, Static Port Trunking

Security

- **Port Security** Static, Dynamic
- **Authentication** 802.1x (Port-Based, MAC-Based), RADIUS, TACACS+
- **Advanced Security** IP Source Guard

Management

- **DHCP** Client, Server, Option 66/67
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- **Security Access** SSH 2.0, SSL
- **Software Upgrade** TFTP, HTTP, Dual Image
- **NTP** NTP server/client

Ordering Information

- **EKI-9510E-2GMPH-AE** 8 x M12 D-Coded PoE + 2 x M12 X-Coded Managed Ethernet Switch, 72/96/110V_{DC} dual power input
- **EKI-9510E-2GMPL-AE** 8 x M12 D-Coded PoE + 2 x M12 X-Coded Managed Ethernet Switch, 24/48V_{DC} dual power input