




| φ23 2.0/16mm C                                 |            |                              |  |
|------------------------------------------------|------------|------------------------------|--|
| FOCAL LENGTH                                   |            | f=16mm                       |  |
| MAX. DIAMETER (RATIO)                          |            | F=1:2.0~22                   |  |
| ELEMENT                                        |            | 9 GROUPS 11 ELEMENTS         |  |
| PICTURE SIZE                                   |            | 13.8x18.4mm                  |  |
| ANGLE                                          | VER. ANGLE | 47.2°                        |  |
|                                                | HOR. ANGLE | 60.6°                        |  |
|                                                | DIA. ANGLE | 72.0°                        |  |
| DISTORTION (TV)                                |            | 0.02%                        |  |
| SHOOTING RANGE AT<br>MINIMUM FOCUS<br>DISTANCE | VER.       | 101 mm                       |  |
|                                                | HOR.       | 135 mm                       |  |
|                                                | DIA.       | 168 mm                       |  |
| MINIMUM FOCUS DISTANCE                         |            | 0.1m                         |  |
| FLANGE BACK                                    |            | 17.526mm in air              |  |
| BACK FOCUS                                     |            | 13.0mm in air                |  |
| FILTER SCREW SIZE                              |            | M40.5x0.5                    |  |
| FRONT/REAR EFFECTIVE DIA.                      |            | FRONT φ31.2mm REAR φ16.5mm   |  |
| MOUNT                                          |            | C-MOUNT                      |  |
| EXIT PUPIL                                     |            | -26.2mm                      |  |
| TEMPERATURE RANGE                              |            | -10~+50° C                   |  |
| STORAGE TEMPERATURE RANGE                      |            | -20~+60° C                   |  |
| RESOLUTION CENTER/CORNER                       |            | CENTER 160本/mm CORNER 80本/mm |  |
| LENS COATING                                   |            | WIDE BAND MULTI COATING      |  |
| WEIGHT                                         |            | 250 g                        |  |

NOTE: Specifications and availability are subject to change without notice  
 注) 本仕様については、予告なしに変更する場合があります。

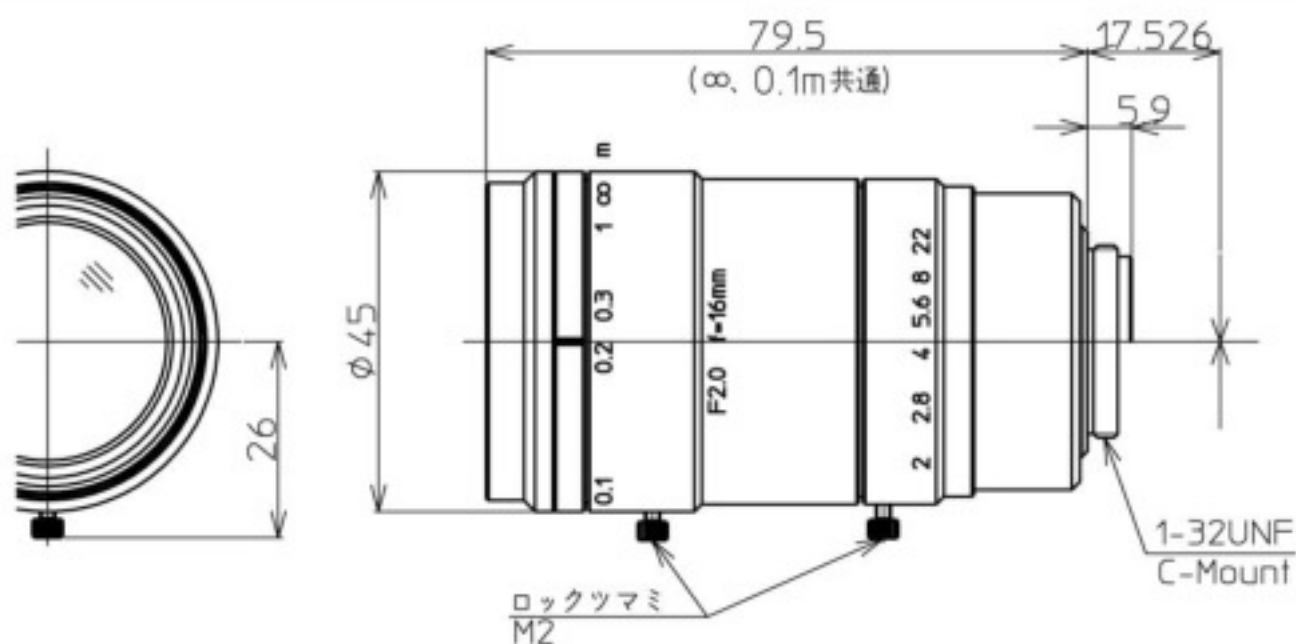

|            |  |             |                 |        |    |        |    |
|------------|--|-------------|-----------------|--------|----|--------|----|
|            |  | 尺<br>度      | 1/1             | 承<br>認 | 入木 | 製<br>図 | 富永 |
|            |  | 機<br>種<br>名 | φ23 F2.0 f=16mm |        |    |        |    |
|            |  | 機<br>種<br>番 | LM16XC          |        |    |        |    |
| 2010.06.03 |  | 作成年月日       |                 |        |    |        |    |