


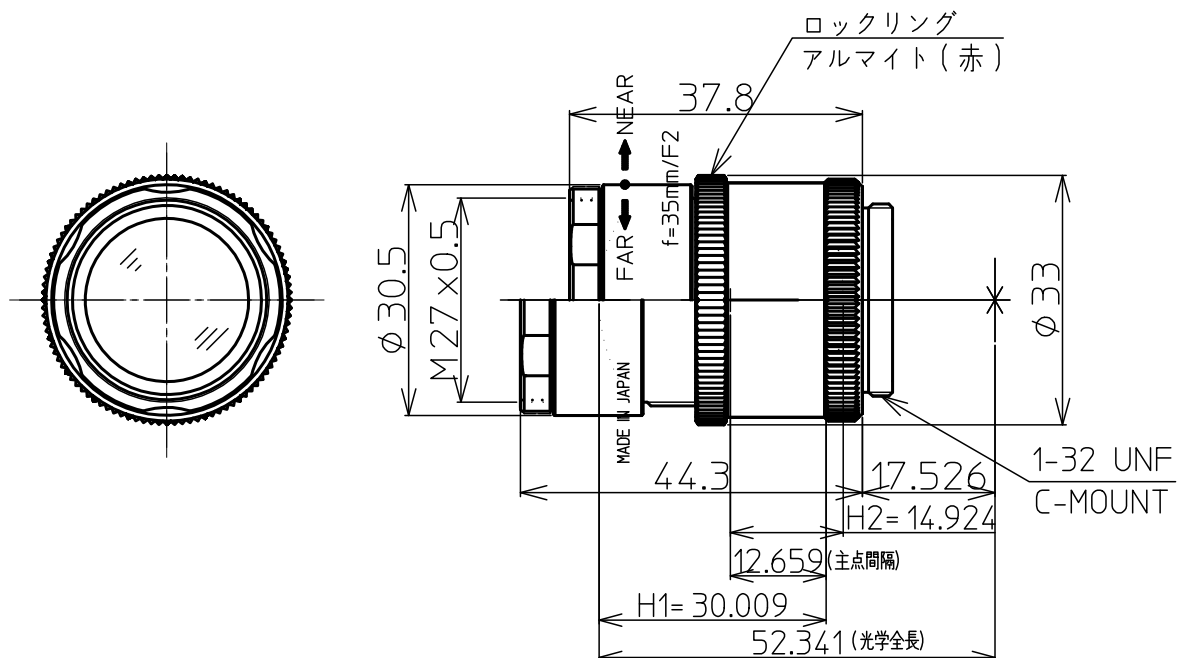

| 2/3" F2/35mm C            |                                          | 1/2"    | 1/3"    |
|---------------------------|------------------------------------------|---------|---------|
| FOCAL LENGTH              | f=35mm                                   |         |         |
| MAX. DIAMETER (RATIO)     | F=1:2,4,8,16                             |         |         |
| ELEMENT                   | 4群 7枚                                    |         |         |
| PICTURE SIZE              | 6.6×8.8mm                                | 4.8×6.4 | 3.6×4.8 |
| ANGLE                     | VER. ANGLE                               | 10.8°   | 7.85°   |
|                           | HOR. ANGLE                               | 14.4°   | 10.5°   |
|                           | DIA. ANGLE                               | 17.9°   | 13.1°   |
| DISTORTION (TV)           | -0.2%                                    | -0.12%  | -0.05%  |
| SHOOTING RANGE AT         | VER. 35.8mm                              | 26.0    | 19.5    |
| MINIMUM FOCUS             | HOR. 47.9mm                              | 34.7    | 26.0    |
| DISTANCE                  | DIA. 60.0mm                              | 43.5    | 32.5    |
| MINIMUM FOCUS DISTANCE    | 0.2m                                     |         |         |
| FLANGE BACK               | 17.526 mm in air                         |         |         |
| BACK FOCUS                | 20.1mm in air (Mechanical 14.0mm in air) |         |         |
| FILTER SCREW SIZE         | M27.0×0.5                                |         |         |
| FRONT/REAR EFFECTIVE DIA. | 前φ21.5mm 後φ11.7mm                        |         |         |
| MOUNT                     | C-MOUNT                                  |         |         |
| EXIT PUPIL                | -38.7                                    |         |         |
| TEMPERATURE RANGE         | -10~+50°C                                |         |         |
| STORAGE TEMPERATURE RANGE | -20~+60°C                                |         |         |
| RESOLUTION CENTER/CORNER  | 中心100本/mm 周辺 80本/mm                      |         |         |
| WEIGHT                    | g                                        |         |         |

NOTE: Specifications and availability are subject to change without notice  
 注) 本仕様については、予告なしに変更する場合があります。

|           |       |             |              |        |    |        |    |
|-----------|-------|-------------|--------------|--------|----|--------|----|
|           |       | 尺<br>度      | 1/1          | 承<br>認 | 八木 | 製<br>図 | 八木 |
|           |       | 機<br>種<br>名 | 2/3" F2 35mm |        |    |        |    |
| 2014.2.24 | 作成年月日 |             |              |        |    |        |    |