


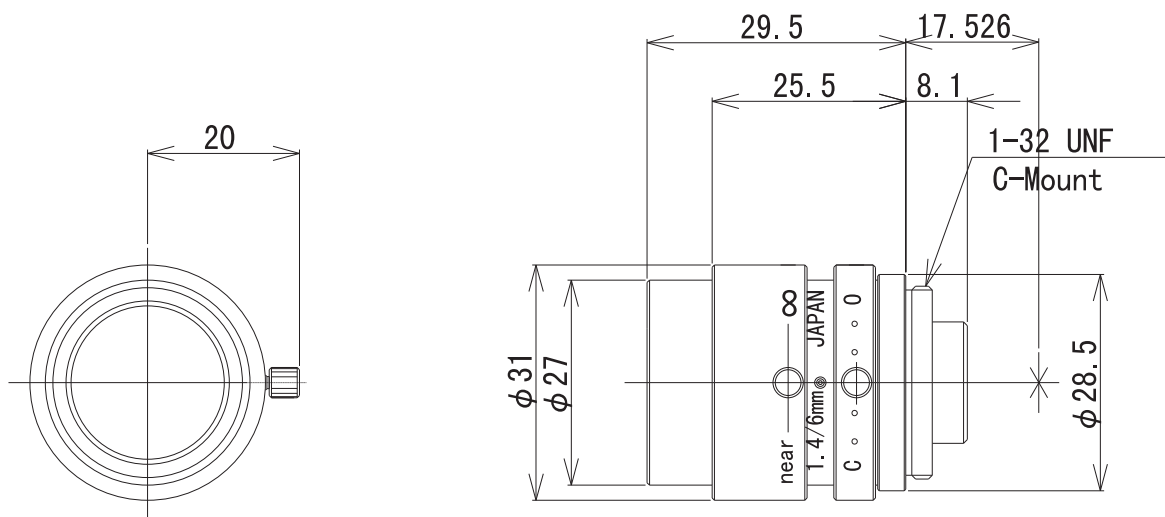

1/2" 1.4/6mm C		1/3"
Focal Length		f=6mm±5%
Max. Diameter (Ratio)		F=1 : 1.4±5%
Element		6 Group 7 Elements
Picture Size		4.8x6.4mm 3.6x4.8
Angle	Ver.	44.0° 33.7°
	Hol.	57.3° 44.2°
	Dia.	69.4° 54.4°
Distortion (TV)		-1.0%
Shooting Range at M.O.D.	Ver.	128mm
	Hol.	174mm
	Dia.	221mm
Minimum Object Distance		0.2m
Flange Back		17.526mm in air
Back Focus		9.46mm in air
Filter Screw Size		M25.5x0.5
Front/Rear Effective Dia.		F: φ16.2mm R: φ8.7mm
Mount		C-MOUNT
Exit Pupil		-77.3mm
Temperature Range		-10~+45° C
Strong Temperature Range		-40~+60° C
Resolution		Center: 100Line/mm Corner: 40Line/mm
Stopper Strength		10kgf · cm
Endurance Tests		Iris: 5,000Times Focus: 5,000Times
Operating Torque		Iris: 50~600gf · cm Focus: 100~1000gf · cm
Weight		60g±5g

1/2" 1.4/6mm

LM6NCL