




| 1" 1.4/35mm C                                  |            | 1"                  | 2/3"      | 1/1.8"             |
|------------------------------------------------|------------|---------------------|-----------|--------------------|
| FOCAL LENGTH                                   |            | f=35mm              |           |                    |
| MAX. DIAMETER (RATIO)                          |            | F=1:1.4~16          |           |                    |
| PICTURE SIZE                                   |            | 9.6x12.8mm          | 6.6x8.8mm | 5.4x7.2mm          |
| ANGLE                                          | VER. ANGLE | 15.8°               | 10.8°     | 8.8°               |
|                                                | HOR. ANGLE | 20.9°               | 14.4°     | 11.8°              |
|                                                | DIA. ANGLE | 26.1°               | 18.0°     | 14.7°              |
| DISTORTION (TV)                                |            | -0.5%               |           |                    |
| SHOOTING RANGE AT<br>MINIMUM FOCUS<br>DISTANCE | VER.       | 82.0mm              | 56.2mm    | 46.0mm             |
|                                                | HOR.       | 110.1mm             | 75.2mm    | 61.4mm             |
|                                                | DIA.       | 139.3mm             | 94.4mm    | 77.0mm             |
| MINIMUM FOCUS DISTANCE                         |            | 0.3m                |           |                    |
| FLANGE BACK                                    |            | 17.526mm in air     |           |                    |
| BACK FOCUS                                     |            | 16.8mm in air       |           |                    |
| FILTER SCREW SIZE                              |            | M35.5x0.5           |           |                    |
| FRONT/REAR EFFECTIVE DIA.                      |            | FRONT $\phi$ 24.3mm |           | REAR $\phi$ 19.1mm |
| MOUNT                                          |            | C-MOUNT             |           |                    |
| EXIT PUPIL                                     |            | -50.9mm             |           |                    |
| TEMPERATURE RANGE                              |            | -10~+50°C           |           |                    |
| STORAGE TEMPERATURE RANGE                      |            | -20~+60°C           |           |                    |
| RESOLUTION CENTER/CORNER                       |            | CENTER 120lp/mm     |           | CORNER 80lp/mm     |
| WEIGHT                                         |            | 135 g               |           |                    |

NOTE: Specifications and availability are subject to change without notice  
 注) 本仕様については、予告なしに変更する場合があります。

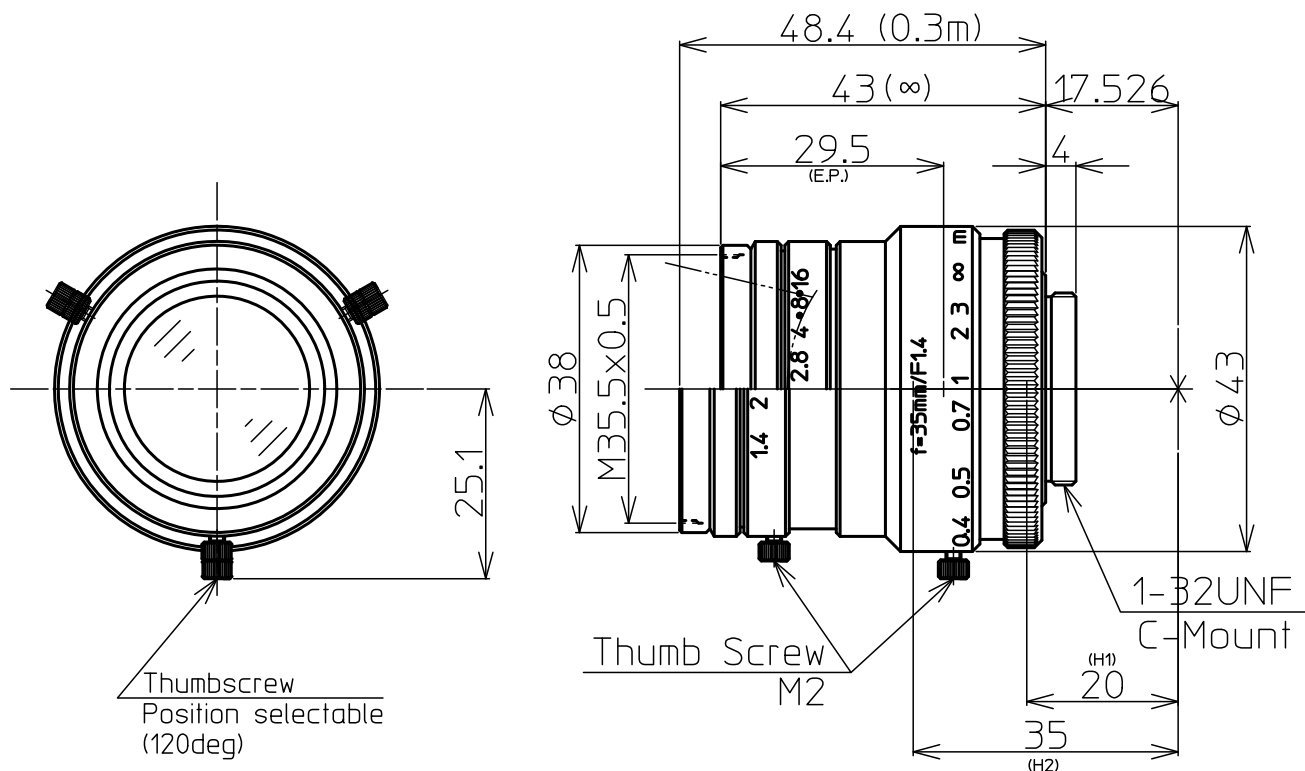

|            |       |     |                |      |         |
|------------|-------|-----|----------------|------|---------|
|            |       | 尺度  | 1/1            | 工場番号 | HR979SW |
|            |       | 機種名 | 1" F1.4 f=35mm |      |         |
| 2015.7.30  | 正面図追加 | 機種番 | LM35HC-SW      |      |         |
| 2014.12.25 | 更新    |     |                |      |         |
| 2013.4.15  | 作成年月日 |     |                |      |         |