


SOM-5897

6th Gen Intel Xeon/Core/Celeron Processors COM Express Basic Module Type 6

NEW

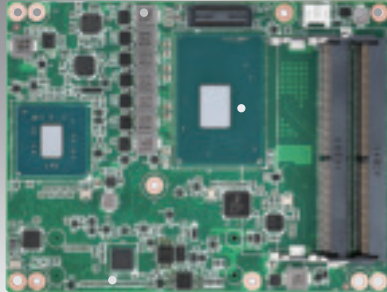

Windows Embedded

iManager susiAccess CE FCC

Features

- 6th Gen Intel Xeon/Core i7/i5/i3/Celeron + PCH QM170
- Dual DDR4 2133, 1.2V Low Power Memory, Max. 32GB
- Support XDP, TPM2.0
- Flexible I/O support: 8 PCIe x1 (Gen3) with LAN, TPM2.0
- Supports iManager susiAccess, and Embedded Software APIs

Software APIs:

- Watchdog
- PC
- SMBus
- H/W Monitor
- GPIO
- Brightness Control


Utilities:

- BIOS flash
- Monitoring
- Embedded Security ID

Specifications

Compliance	Form-Factor	COM Express Basic Module										
	Pin-out Type	COM Express R2.1 Type 6 pin out										
Platform	Processor	i7-6820EQ	i7-6822EQ	i5-6440EQ	i5-6442EQ	i3-6100E	i3-6102E	G3900E	E3-1505M V5	E3-1505L V5	E3-1515M v5	
	Base Frequency	2.8GHz	2.0GHz	2.7GHz	1.9GHz	2.7GHz	1.9GHz	2.4GHz	2.8GHz	2.0GHz	2.8GHz	
	Turbo Boost Freq.	3.5GHz	2.8GHz	3.4GHz	2.7GHz	-	-	-	3.7GHz	2.8GHz	3.7GHz	
	Core/Tread	4/8	4/8	4/4	4/4	2/4	2/4	2/2	4/8	4/8	4/8	
	LLC	8	8	6	6	3	3	2	8	8	8	
	CPU TDP	45W	25W	45W	25W	35W	25W	35W	45W	25W	45W	
	Chipset	Core with QM170; Xeon with CM236										
	BIOS	AMI UEFI 128Mbit										
Memory	Technology	DDR4										
	ECC Support	Not supported	Not supported	Not supported	Not supported	Not supported	Not supported	Not supported	Support	Support	Support	
	Channel/Socket	Dual Channels / 2 sockets										
	Max. Capacity	Up to 32GB										
Graphics	Controller	Intel Gen 9							Intel® HD Graphics P530		Intel® Iris™ Pro Graphics P580	
	Base/Turbo Freq.	350/1000	350/1000	350/1000	350/1000	350/950	350/950	350/950	350/1050	350/1000	350/1000	
	Graphics Memory	Intel DMV15.0, share memory up to 1024MB										
	3D/HW Acceleration	HW Encode: H.265/HEVC, H.264, MPEG2, HW Decode: H.264, Direct3D 12(2015)/11.2/11.1/10/9, Direct2D, OpenGL 4.4, OpenCL 2.0/1.2										
Display	VGA	1 port up to 1920 x 1200 @ 60 Hz										
	LCD	LVDS Dual Channel 18/24-bit, up to 1920 x 1200 @ 60Hz										
	DDI	2 Port configurable to HDMI1.4/DVI/Displayport1.2										
	HDMI up to	4096 x 2160@24Hz, DVI up to 1920 x 1200@60Hz, DP up to 4096 x 2304 @ 60Hz										
Expansion	Multiple Display	Dual display, Triple display with each display combinations										
	PCI Express x16	1 PCIe x16 configurable to 1 x16, 2 x8, 1 x8 + 2 x4										
	PCI Express x1	8 PCIe x1, configurable to x4 or x2										
	Audio Interface	Intel HD Audio Interface										
Serial Bus	LPC	Yes										
	SMBus	Yes										
Ethernet	PC Bus	Yes										
	Controller	Intel i219										
I/O	Speed	10/100/1000 Mbps										
	SATA	4 SATAIII 6.0Gb/s										
	USB3.0	4 Ports										
	USB2.0	8 Ports										
	SPI Bus	Yes										
	GPIO	8-bit										
	Watchdog	65536 level, 0-65535 sec										
	COM Port	2 Ports (2-wire)										
	Express Card	2 Ports										
	TPM	Optional TPM2.0 (Infineon SLB9665)										
Power	Smart Fan	2 Ports; 1 port on COM module. Support 12V Fan, 1 port on carrier board										
	Type	ATX: Vin, VSB; AT: Vin										
	Supply Voltage	Vin: 8.5V (9V-5%) ~ 20V (19+5%); VSB: 5 +/-5%, RTC Battery: 2.0-3.3V										
Environment	Power Consumption	Max: (16GB DDR4 2133) i7-6820EQ +12V @ 43.3W Idle: (16GB DDR4 2133) i7-6820EQ +12V @ 5.23W *Only for reference and will depends on custom software loading, detail refer to user manual										
	Temperature	Operating Standard: 0 ~ 60° C (32 ~ 140° F), Extend: -40 ~ 85° C (-40 ~ 185° F)				Storage: -40 ~ 85° C (-40 ~ 185° F)						
Mechanical	Humidity	Operating: 40° C @ 95% relative humidity, non-condensing				Storage: 60° C @ 95% relative humidity, non-condensing						
	Vibration Resistance	3.5 Grms										
Mechanical	Dimensions	125 x 95 mm (4.92" x 3.74")										

Block Diagram

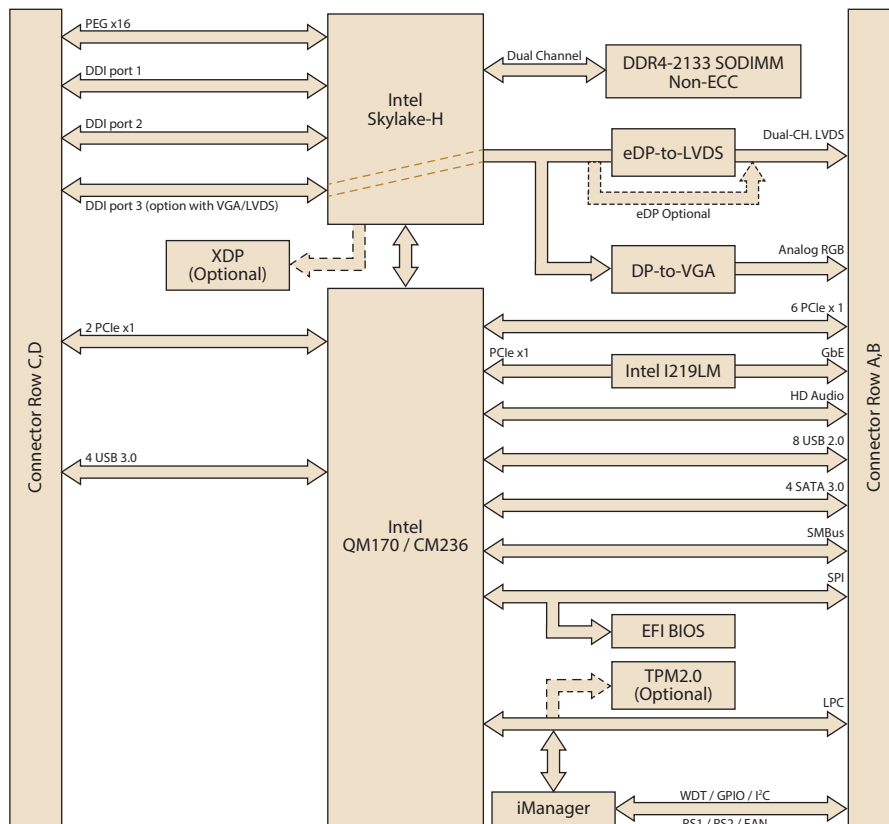

Ordering Information

Part No.	CPU	Freq.	Core	CPU TDP	LLC	DDR4 Memory	Thermal Solution	Operating Temperature
SOM-5897C7-U8A1E	i7-6820EQ	2.8 GHz	4	45W	8	non-ECC	Active	0 – 60 °C
SOM-5897C7-U0A1E	i7-6822EQ	2.0 GHz	4	25W	8	non-ECC	Active	0 – 60 °C
SOM-5897C5-U7A1E	i5-6440EQ	2.7 GHz	4	45W	6	non-ECC	Active	0 – 60 °C
SOM-5897C5-S9A1E	i5-6442EQ	1.9 GHz	4	25W	6	non-ECC	Active	0 – 60 °C
SOM-5897C3-U7A1E	i3-6100E	2.7 GHz	2	35W	3	non-ECC	Active	0 – 60 °C
SOM-5897C3-S9A1E	i3-6102E	1.9 GHz	2	25W	3	non-ECC	Active	0 – 60 °C
SOM-5897CR-U4A1E	G3900E	2.4 GHz	2	35W	2	non-ECC	Active	0 – 60 °C
SOM-5897E4C-U7A1E	E3-1505M V5	2.8 GHz	4	45W	8	ECC	Active	0 – 60 °C
SOM-5897E4C-U0A1E	E3-1505L V5	2.0 GHz	4	25W	8	ECC	Active	0 – 60 °C
SOM-5897E4C-U8A1E	E3-1515M V5	2.8 GHz	4	45W	8	ECC	Active	0 – 60 °C
SOM-5897E4X-U0A1E	Xeon E3-1505L V5	2.0 GHz	4	25W	8	ECC	Active	-40 – 85 °C
SOM-5897C7Z2-U0A1E	i7-6822EQ	2.0 GHz	4	25W	8	non-ECC	Active	-40 – 85 °C
SOM-5897C7X-U8A1E	i7-6820EQ	2.8 GHz	4	45W	8	non-ECC	Active	-40 – 85 °C
SOM-5897E4X-U7A1E	Xeon E3-1505M V5	2.8 GHz	4	45W	8	ECC	Active	-40 – 85 °C
SOM-5897E4X-U8A1E	Xeon E3-1515M V5	2.8 GHz	4	45W	8	ECC	Active	-40 – 85 °C

Development Board

Part No.	Description
SOM-DB5800-00A2E	COMe Devel. Board Type6 pint-out Rev. A2

Packing List

Part No.	Description	Quantity
-	SOM-5897 CPU module	1
1960073944N001	Heatspreader	1

Optional Accessories

Part No.	Description
1960048820N001	Semi-Cooler 125 x 95 x 33 mm with 12V FAN
1960073941T061	Low Profile DHCS (125 x 95 x 30 mm)
1960073941T051	High Perf. DHCS (125 x 95 x 43 mm)

* Test conditions follow Advantech regulations and procedures.

* DHCS: Dynamic Heat Conduction System Cooler

Embedded OS

OS	Part No.	Description
Win10 IoT LTSB	2070015177	Img Win10 IoT Ent_LTSB 64 bit